



# 1000-1100nm OPTICAL ISOLATORS

www.isowave.com  
64 Harding Avenue  
Dover NJ 07801  
Phone 973-328-7000  
Fax 973-328-7036  
sales@isowave.com

## DESCRIPTION

ISOWAVE offers a wide variety of isolators for the 1000-1100nm wavelength band with designs centered at 1064nm. Features to choose from include 2mm, 3mm 4mm and 5mm clear apertures, fixed or tunable polarizers, broad band isolation without tuning and three power level options (Medium and High). Single and Semi-Double (SD) stage versions provide different isolation level options. A Faraday rotator with no polarizers is also available.

Low – Absorptive glass plate  
Medium – Glan Taylor Polarizer (no escape ports)  
High – Glan Taylor Polarizer with dual escape ports

## FEATURES

- Wide Tuning Range
- Removable Mounting Collar
  - High Isolation
  - Low Insertion Loss

MODEL NUMBER	Clear Aperture	Tunable	Broad-band	Isolation Minimum / Typical	Ins Loss Typical / Maximum	Transmission Minimum / Typical	Power Handling (CW)	Diameter	Length
	mm	Yes/No	Yes/No	dB	dB	%	W/cm2	inch / mm	inch/mm
I-106-2-FR	2	N	N	30 / 35	0.2	95	300	1.0 / 25.4	2.40 / 61
I-106-2L	2	N	N	35 / 38	0.3 / 0.5	89 / 93	50	1.0 / 25.4	2.40 / 61
I-106-2M	2	N	N	35 / 38	0.4 / 0.7	85 / 91	100	1.0 / 25.4	3.54 / 90
I-106-2H	2	N	N	35 / 38	0.4 / 0.7	85 / 91	250	1.0 / 25.4	4.13 / 105
I-1011C-2L	2	N	Y	35/38	0.4 / 0.7	85 / 91	50	1.0 / 25.4	2.40 / 61
I-1011C-2M	2	N	Y	38 / 40	0.5 / 0.7	85 / 89	100	1.0 / 25.4	3.54 / 90
I-1011C-2H	2	N	Y	38 / 40	0.5 / 0.7	85 / 89	250	1.0 / 25.4	4.13 / 105
I-106-3-FR	3	N	N	30 / 35	0.2	95	300	1.0 / 25.4	2.40 / 61
I-106-3L	3	N	N	35 / 38	0.3 / 0.5	89 / 93	50	1.0 / 25.4	2.40 / 61
I-106-3M	3	N	N	35 / 38	0.4 / 0.7	85 / 91	100	1.0 / 25.4	3.84 / 98
I-106-3H	3	N	N	35 / 38	0.4 / 0.7	85 / 91	250	1.0 / 25.4	4.43 / 113
I-106-4-FR	4	N	N	30/35	0.2	95	300	1.375 / 34.9	3.0 / 76
I-106T-4L	4	Y	N	35 / 38	0.3 / 0.5	89 / 93	50	1.375 / 34.9	4.0 / 102
I-106T-4M	4	Y	N	35 / 38	0.4 / 0.7	85 / 91	100	1.375 / 34.9	4.0 / 102
I-106T-4H	4	Y	N	35 / 38	0.4 / 0.7	85 / 91	250	1.375 / 34.9	5.01 / 127
I-106B-4	4	Y	N	30 / 35	1.0 / 1.2	75 / 79	10	0.75 / 19	1.48 / 37.6
I-106-5-FR	5	N	N	30/35	0.2	95	300	1.375 / 34.9	3.0 / 76
I-106T-5L	5	Y	N	35 / 38	0.3 / 0.5	89 / 93	50	1.375 / 34.9	4.0 / 102
I-106T-5M	5	Y	N	35 / 38	0.4 / 0.7	85 / 91	100	1.375 / 34.9	4.0 / 102
I-106T-5H	5	Y	N	35 / 38	0.4 / 0.7	85 / 91	250	1.375 / 34.9	5.01 / 127
I-1011C-L	5	Y	Y	35 / 38	0.6 / 0.75	84 / 86	50	1.375 / 34.9	4.0 / 102
I-1011C-M	5	Y	Y	35 / 38	0.6 / 0.75	84 / 86	100	1.375 / 34.9	4.0 / 102
I-1011C-H	5	Y	Y	35 / 38	0.6 / 0.75	84 / 86	250	1.375 / 34.9	5.01 / 127
I-106-SD-L	5	N	N	55 / 60	1.0 / 1.5	70 / 79	50	1.375 / 34.9	5.09 / 130
I-106-SD-M	5	N	N	55 / 60	1.0 / 1.5	70 / 79	100	1.375 / 34.9	5.09 / 130
I-106-SD-H	5	N	N	55 / 60	1.0 / 1.5	70 / 79	250	1.375 / 34.9	5.39 / 137









### Part Number Options

FR = Faraday Rotator  
L,M, H = Polarizer Power Level Options: Low, Medium, High  
C = Broadband Isolation: 30dB over +/-50nm no tuning required  
T = Tunable: Input polarizer may be rotated to maximize isolation  
SD = Semi Double: Single center polarizer, two rotator isolator.

### Wavelength Options

\*All isolators may be ordered centered anywhere between 1000-1100nm with 1064nm as standard. Isowave will optimize on best effort basis using available lasers, or customer may supply laser for alignment and testing.  
\*Unless otherwise specified, all 5mm CA isolators are available as 4mm CA with identical mechanical and optical specifications

# 1000-1100nm OPTICAL ISOLATORS

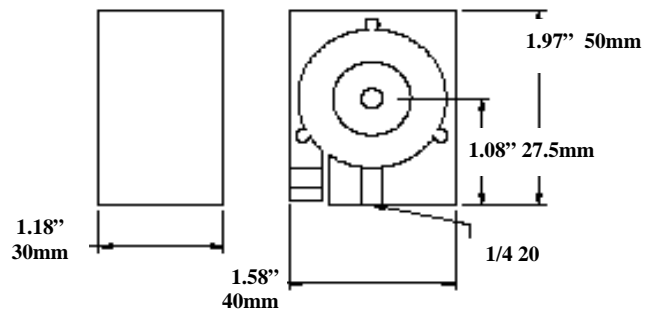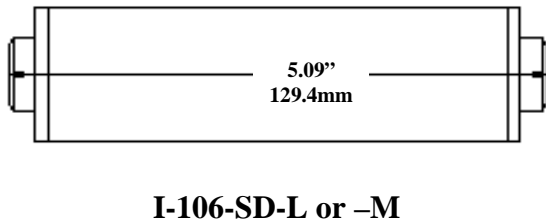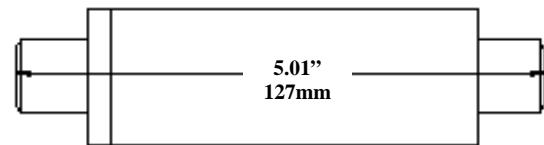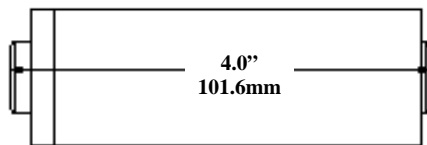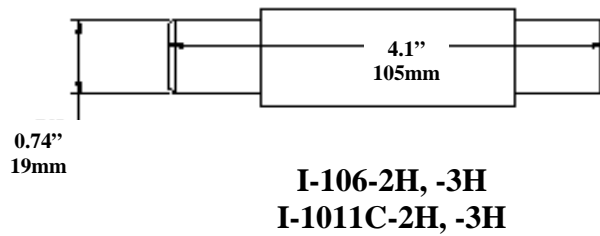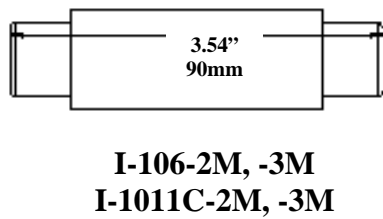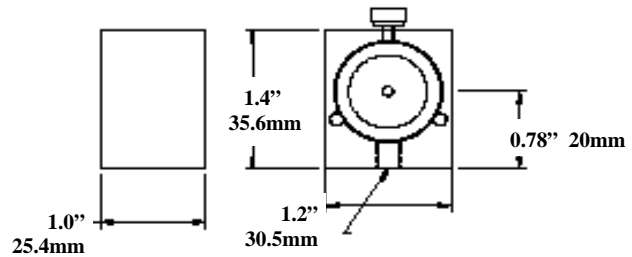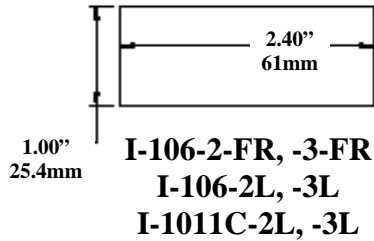




# 1000-1100nm OPTICAL ISOLATORS

www.isowave.com  
64 Harding Avenue  
Dover NJ 07801  
Phone 973-328-7000  
Fax 973-328-7036  
sales@isowave.com

### Theoretical Curve 1011 (Compensated) and 106T (Standard Tunable)

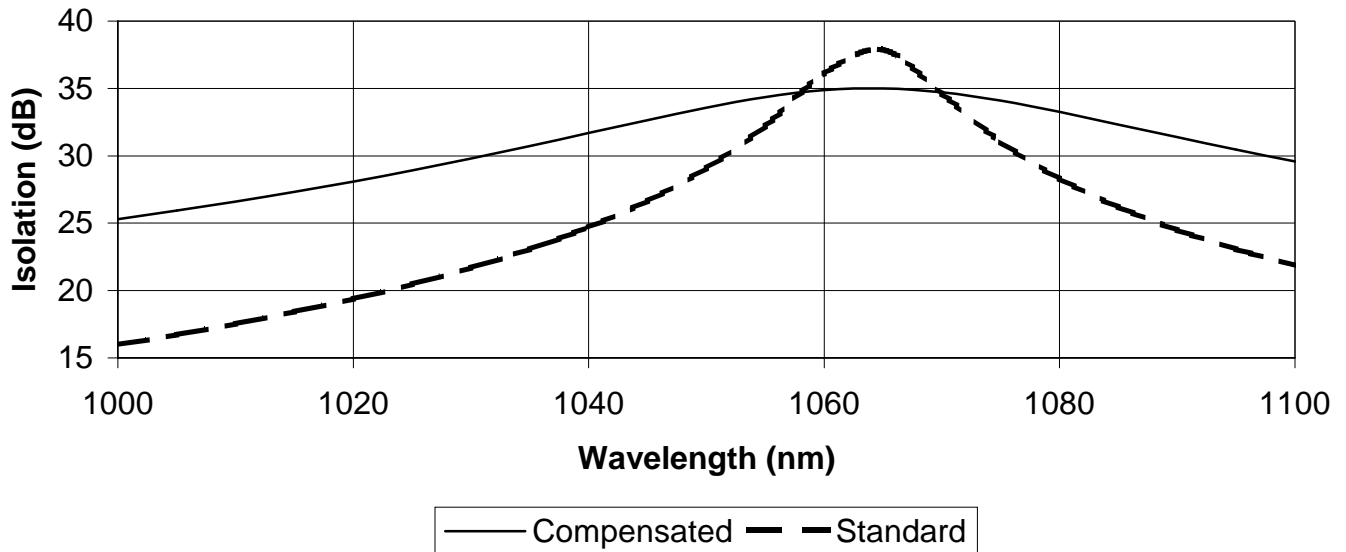

### Theoretical Curve I-106-SD

