


**100 Gbit/s VCSEL (850 nm)**  
**Chip type: quasi single mode**  
**Contact type: GS/SG**

Product Code:

VM100-910-SG-qSM-C1 1x1

VM100-910-SG-qSM-C4 4x1

### Engineering Samples

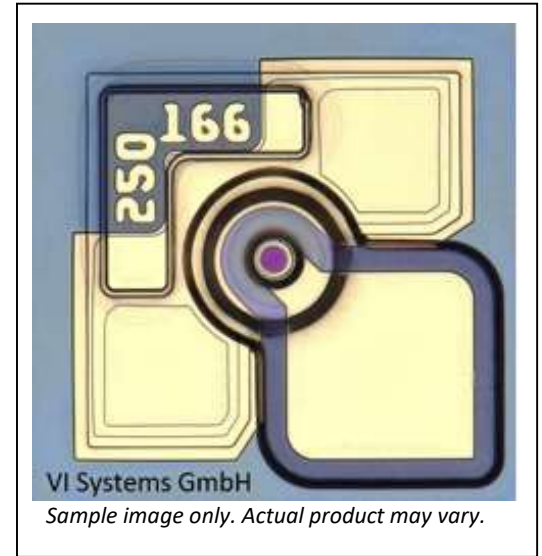

### Product Description

These compact and very high modulation rate top-emitting GaAs-based vertical cavity surface emitting laser (VCSEL) chips and 1xN (N=4,12) arrays are available as engineering samples for use in the development and evaluation of optical interconnections, optical backplanes and integrated waveguides, and next-generation optical data communications systems. The VCSELs are contacted on the top-surface individually using ground-source (GS) microprobes, wire bonds, or flip-chip bonds.

Optical aperture: ~3µm

#### Features

- Single chips and 4-ch arrays
- Up to 112 Gbit/s per channel
- Device-to-device pitch of 250 µm
- Suitable for wire or flip-chip bonding

#### Applications

- Ethernet
- Proprietary optical interconnects
- Active Optical Cables (AOC)
- Short-reach 25G and 100G Ethernet


| Parameter           | Typical     | Notes |
|---------------------|-------------|-------|
| Emission wavelength | 910 nm      |       |
| Data rate           | ~112 Gbit/s | PAM-4 |
| Threshold current   | ~ 0.5 mA    |       |
| Peak output power   | ~3 mW @85°C |       |

### Electro-Optical Specifications (T = 0 to 85°C)


| Parameter                | Symbol                  | Condition | Min | Typ | Max | Unit     |
|--------------------------|-------------------------|-----------|-----|-----|-----|----------|
| Emission wavelength      | $\lambda$               |           | 900 | 910 | 920 | nm       |
| Maximum data rate        | BR                      |           |     | 50  | 56  | GBaud/s  |
| Optical bandwidth        | BW (f3dB <sub>o</sub> ) |           |     | 25  | 33  | GHz      |
| Slope efficiency         | $\eta$                  | 3 mA      | 0.3 |     | 0.5 | W/A      |
| Threshold current        | I <sub>th</sub>         | 25-85°C   |     |     | 0.5 | mA       |
| Differential resistance  | R <sub>d</sub>          | 5 mA      |     | 80  | 100 | $\Omega$ |
| Beam divergence          | $\Theta$                | FWHM      |     | 10  |     | °        |
| Peak output power        | P <sub>max</sub>        |           |     | 3   | 5   | mW       |
| Spectral bandwidth (RMS) | $\Delta\lambda_{RMS}$   | 5 mA      |     |     | 0.5 | nm       |

\*anti-reflection coating is optimized for <1% reflectivity within the range 840 nm - 960 nm


### LIV Characteristics

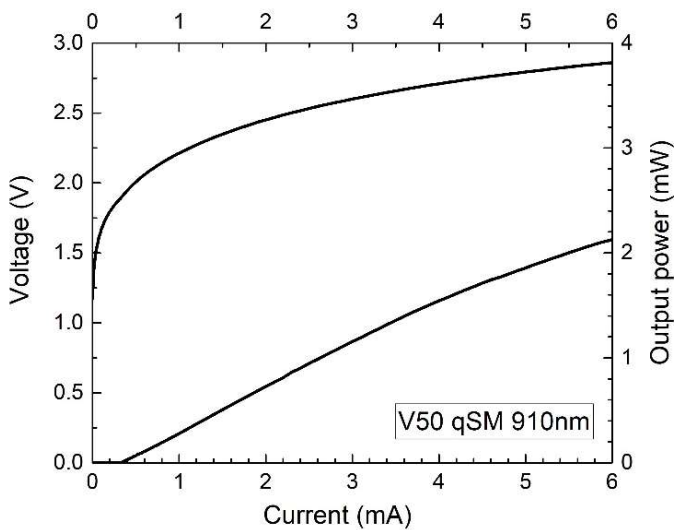

### Optical Spectrum

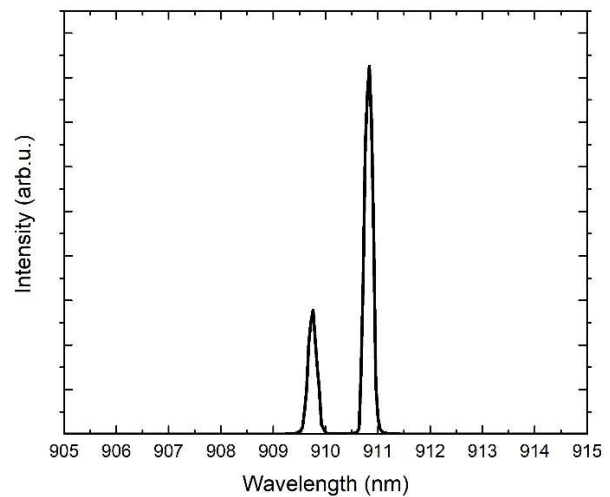


### 50 Gbit/s NRZ 25°C

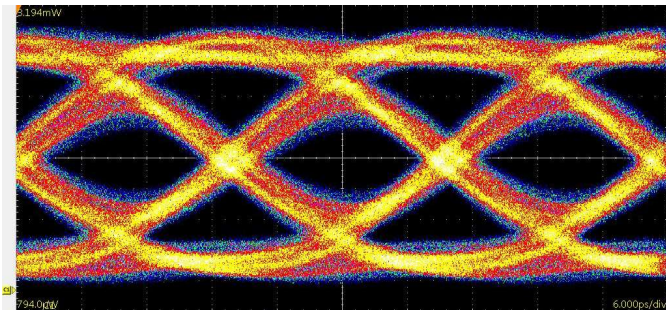

Without pre-emphasis or equalization

### 100 Gbit/s PAM4 25°C

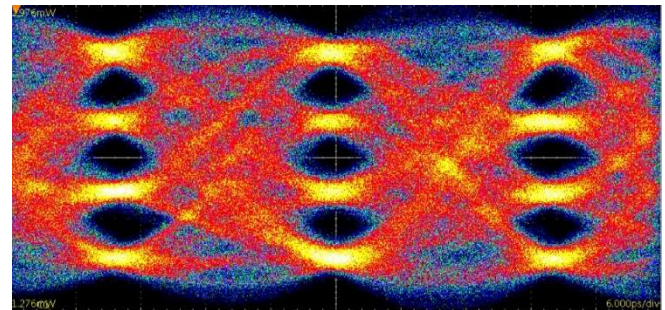

With 6-tap FFE pre-emphasis

Transmitter: SHF BPG 12104A. Receiver: Tektronix DSA8300 w. 80C15 Optical Sampling Module.

### Absolute Maximum Ratings


| Parameter               | Symbol   | Condition   | Min | Typ | Max | Unit |
|-------------------------|----------|-------------|-----|-----|-----|------|
| Peak forward current    | $I_f$    |             |     |     | 9   | mA   |
| Maximum reverse voltage | $V_{rv}$ |             |     |     | 5   | V    |
| Operating temperature   | $T_{op}$ |             |     |     | 85  | °C   |
| Storage temperature     | $T_{st}$ |             | -40 |     | 100 | °C   |
| Soldering temperature   | $T_{sl}$ | max 260 sec |     |     | 150 | °C   |

Stress in excess of any of the individual Absolute Maximum Ratings can cause immediate irreversible damage to the component even if all other parameters are within the electro-optical specifications. Exposure to any of the Absolute Maximum Ratings for extended periods can adversely affect the reliability of these chips.

### Mechanical Dimensions

| Parameter              | Type  | Min | Typ | Max  | Unit          |
|------------------------|-------|-----|-----|------|---------------|
| VCSEL pitch            | All   |     | 250 |      | $\mu\text{m}$ |
| Length 1x1 VCSEL chip  | 910C1 |     | 210 | 250  | $\mu\text{m}$ |
| Length 1x4 VCSEL array | 910C4 |     | 960 | 1000 | $\mu\text{m}$ |
| Height                 | All   | 140 | 150 | 160  | $\mu\text{m}$ |
| Width                  | All   |     | 210 | 250  | $\mu\text{m}$ |

### Dimensions

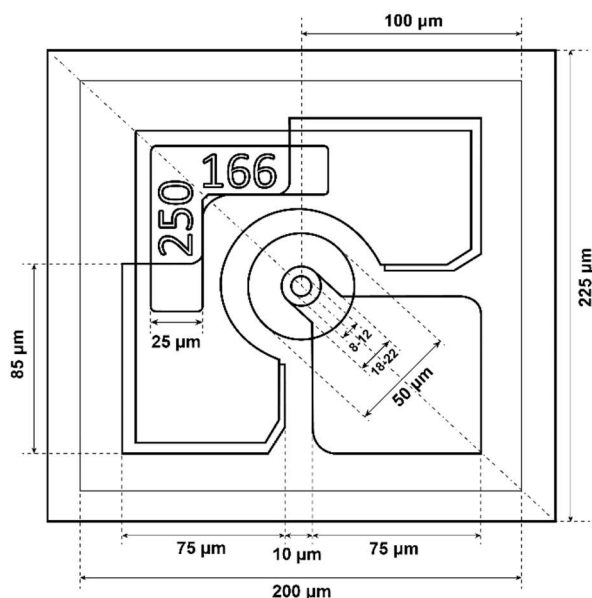

### Qualification Notification

The VM100-910Cx-qSM has been tested to meet specifications outlined in this data sheet at room temperature. However, it has not undergone full qualification testing or characterization and therefore may not meet the performance specifications over all extremes.



#### VI Systems GmbH

Hardenbergstrasse 7  
10623 Berlin

Tel.: +49 30 3083143 30

Fax: +49 30 3083143 59

[sales@v-i-systems.com](mailto:sales@v-i-systems.com)

[www.v-i-systems.com](http://www.v-i-systems.com)