

1000 nm band Phase Modulators

### PHOTLINE MODULATOR



operate in the 1000 nm wavelength band. They are available with various modulation bandwidths, from low frequency to 10 GHz and beyond.

The Photline NIR-MPX series are phase modulators especially designed to

Like all iXBlue Near InfraRed (NIR) modulators, the NIR-MPX series use a proton exchanged based waveguide process that confers them an unparalleled stability even when operating at high optical power.

### **FEATURES**

- High optical power : 100 mW
- High Bandwidth version > 10 GHz
- High stability
- Low Vπ
- Low insertion loss

#### **APPLICATIONS**

- Interferometric based sensor
- Spectral broadening
- Frequency shifting
- Laser combining
- Pound-Drever-Hall locking (PDH)

#### **OPTIONS**

- 20 GHz version
- Hermetic sealing
- 800 nm, 1300 nm band versions

#### **RELATED EQUIPMENTS**

- Matched RF amplifiers
- NIR-MX-LN intensity modulators

### NIR-MPX-LN-0.1 Performance Highlights

Parameter	Min	Тур	Max	Unit
Operating wavelength	980	-	1150	nm
Electro-optical bandwidth	-	150	-	MHz
Vπ RF @50 kHz	-	2.5	-	V
Insertion loss	-	3	-	dB

Specifications given at 25 °C, 1060 nm

### NIR-MPX-LN-02 Performance Highlights

Parameter	Min	Тур	Max	Unit
Operating wavelength	980	-	1150	nm
Electro-optical bandwidth	2	-	-	GHz
Vπ RF @50 kHz	-	3	-	V
Insertion loss	-	3	-	dB

Specifications given at 25 °C, 1060 nm

# NIR-MPX-LN-05 Performance Highlights

Parameter	Min	Тур	Max	Unit
Operating wavelength	980	-	1150	nm
Electro-optical bandwidth	5	-	-	GHz
Vπ RF @50 kHz	-	4.5	-	V
Insertion loss	-	3	-	dB

Specifications given at 25 °C, 1060 nm

### NIR-MPX-LN-10 Performance Highlights

Parameter	Min	Тур	Max	Unit
Operating wavelength	980	-	1150	nm
Electro-optical bandwidth	-	12	-	GHz
Vπ RF @50 kHz	-	5.5	-	V
Insertion loss	-	3	-	dB

Specifications given at 25 °C, 1060 nm



1000 nm band Phase Modulators

PHOTLINE MODULATOR

# NIR-MPX-LN-0.1

150 MHz Phase Modulator

#### **Electrical Characteristics**

Parameter	Symbol	Condition	Min	Тур	Max	Unit
Electro-optic bandwidth	S <sub>21</sub>	RF electrodes, from 2 GHz	-	150	-	MHz
Vπ RF @50 kHz	VπRF <sub>50 kHz</sub>	RF electrodes	-	2.5	3	V
RF input impedance	Z <sub>in-RF</sub>	-	-	10 000	-	Ω

### **Optical Characteristics**

Parameter	Symbol	Condition	Min	Тур	Max	Unit	
Crystal	-	-	Lithium Niobate X-Cut Y-Prop				
Waveguide process	-	-	Proton exchange				
Operating wavelength	λ	-	980	1060	1150	nm	
Insertion loss	IL	Without connectors	-	3	4	dB	
Optical return loss	ORL	-	-40	-45	-	dB	

All specifications given at 25°C, 1060 nm, unless differently specified

#### **Absolute Maximum Ratings**

Parameter	Symbol	Min	Max	Unit
Modulation voltage range	EV <sub>in</sub>	-20	20	V
Optical input power	0P <sub>in</sub>	-	20	dBm
Operating temperature	ОТ	0	+70	°C
Storage temperature	ST	-40	+85	°C



1000 nm band Phase Modulators

# PHOTLINE MODULATOR

# NIR-MPX-LN-02

2 GHz Phase Modulator

#### **Electrical Characteristics**

Parameter	Symbol	Condition	Min	Тур	Max	Unit
Electro-optic bandwidth	S <sub>21</sub>	-	2	-	-	GHz
Ripple S <sub>21</sub>	ΔS <sub>21</sub>	-	-	0.5	1	dB
Electrical return loss	S <sub>11</sub>	-	-	-12	-10	dB
Vπ RF @50 kHz	VπRF <sub>50 kHz</sub>	-	-	3	4	V
RF input impedance	Z <sub>in-RF</sub>	-	-	50	-	Ω

### **Optical Characteristics**

Parameter	Symbol	Condition	Min	Тур	Max	Unit	
Crystal	-	-	Lithium Niobate X-Cut Y-Prop				
Waveguide process	-	-	Proton exchange				
Operating wavelength	λ	-	980	1060	1150	nm	
Insertion loss	IL	Without connectors	-	3	4	dB	
Optical return loss	ORL	-	-40	-45	-	dB	

All specifications given at 25°C, 1060 nm, unless differently specified

### **Absolute Maximum Ratings**

Parameter	Symbol	Min	Max	Unit
RF input power	EP <sub>in</sub>	-	28	dBm
Optical input power	OP <sub>in</sub>	-	20	dBm
Operating temperature	ОТ	0	+70	°C
Storage temperature	ST	-40	+85	°C



1000 nm band Phase Modulators

# PHOTLINE MODULATOR

# NIR-MPX-LN-05

5 GHz Phase Modulator

#### **Electrical Characteristics**

Parameter	Symbol	Condition	Min	Тур	Max	Unit
Electro-optic bandwidth	S <sub>21</sub>	-	5	-	-	GHz
Ripple S <sub>21</sub>	ΔS <sub>21</sub>	-	-	0.5	1	dB
Electrical return loss	S <sub>11</sub>	-	-	-12	-10	dB
Vπ RF @50 kHz	VπRF <sub>50 kHz</sub>	-	-	4.5	5.5	V
RF input impedance	$Z_{in-RF}$	-	-	50	-	Ω

### **Optical Characteristics**

Parameter	Symbol	Condition	Min	Тур	Max	Unit	
Crystal	-	-	Lithium Niobate X-Cut Y-Prop				
Waveguide process	-	-	Proton exchange				
Operating wavelength	λ	-	980	1060	1150	nm	
Insertion loss	IL	Without connectors	-	3	4	dB	
Optical return loss	ORL	-	-40	-45	-	dB	

All specifications given at 25°C, 1060 nm, unless differently specified

#### **Absolute Maximum Ratings**

Parameter	Symbol	Min	Max	Unit
RF input power	EP <sub>in</sub>	-	28	dBm
Optical input power	OP <sub>in</sub>	-	20	dBm
Operating temperature	ОТ	0	+70	°C
Storage temperature	ST	-40	+85	°C



1000 nm band Phase Modulators

# PHOTLINE MODULATOR

# NIR-MPX-LN-10

10 GHz Phase Modulator

#### **Electrical Characteristics**

Parameter	Symbol	Condition	Min	Тур	Max	Unit
Electro-optic bandwidth	S <sub>21</sub>	-	10	12	-	GHz
Ripple S <sub>21</sub>	ΔS <sub>21</sub>	-	-	0.5	1	dB
Electrical return loss	S <sub>11</sub>	-	-	-12	-10	dB
Vπ RF @50 kHz	VπRF <sub>50 kHz</sub>	-	-	5.5	6.5	٧
RF input impedance	Z <sub>in-RF</sub>	-	-	50	-	Ω

### **Optical Characteristics**

Parameter	Symbol	Condition	Min	Тур	Max	Unit
Crystal	-	-	Lithium Niobate X-Cut Y-Prop		р	
Waveguide process	-	-	Proton exchange			
Operating wavelength	λ	-	980	1060	1150	nm
Insertion loss	IL	Without connectors	-	3	4	dB
Optical return loss	ORL	-	-40	-45	-	dB

All specifications given at 25°C, 1060 nm, unless differently specified

### **Absolute Maximum Ratings**

Parameter	Symbol	Min	Max	Unit
RF input power	EP <sub>in</sub>	-	28	dBm
Optical input power	OP <sub>in</sub>	-	20	dBm
Operating temperature	ОТ	0	+70	°C
Storage temperature	ST	-40	+85	°C




1000 nm band Phase Modulators

### PHOTLINE MODULATOR

#### **Mechanical Diagram and Pinout**

All measurements in mm

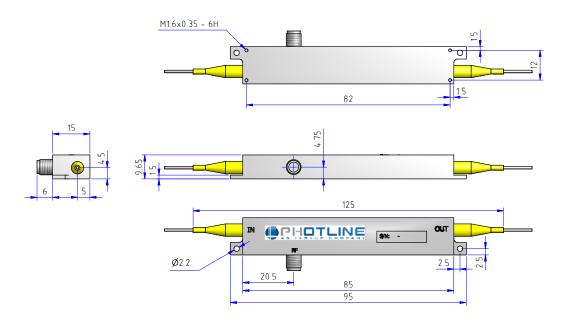

Port	Function	Note		
IN	Optical input port	Polarization maintaining fiber, Corning PM 98-U25A, Length 1.5 meter. Buffer diameter 900 μm		
OUT	Optical output port	Polarization maintaining fiber, Corning PM 98-U25A, Length 1.5 meter. Buffer diameter 900 μm		
RF	RF input port	Wiltron female K		

#### **Ordering information**

### NIR-MPX-LN-XX-Y-Z-AB-CD

**XX = Bandwidth** : **0.1** 150 MHz **02** 2 GHz **05** 5 GHz **10** 10 GHz

Y = Input fiber : P Polarization maintaining S Standard single mode Z = Output fiber : P Polarization maintaining S Standard single mode

AB = Input connector: 00 bare fiber FA FC/APC FC FC/SPC

CD = Output connector: 00 bare fiber FA FC/APC FC FC/SPC

Note: optical connectors are Senko with narrow key or equivalent

#### **About us**

iXBlue Photonics includes iXBlue iXFiber brand that produces specialty optical fibers and Bragg gratings based fiber optics components and iXBlue Photline brand that provides optical modulation solutions based on the company lithium niobate (LiNbO<sub>2</sub>) modulators and RF electronic modules.

iXBlue Photonics serves a wide range of industries: sensing and instruments, defense, telecommunications, space and fiber lasers as well as research laboratories all over the world.

3, rue Sophie Germain 25 000 Besançon - FRANCE

Tel.: +33 (0) 381 853 180 - Fax: +33 (0) 381 811 557

Ixblue reserves the right to change, at any time and without notice, the specifications, design, function or form of its products described herein. All statements, specification, technical information related to the products herein are given in good faith and based upon information believed to be reliable and accurate at homement of printing. However the accuracy and completeness thereof is not guaranteed. No liability is assumed for any inaccuracies and as a result of use of the products. The user must validate all parameters for each application before use and he assumes all risks in connection with the use of the products